

ESTCP Cost and Performance Report

(ER-0009)



Bioavailable Ferric Iron (BAFell) Assay

February 2007



ENVIRONMENTAL SECURITY
TECHNOLOGY CERTIFICATION PROGRAM

U.S. Department of Defense

COST & PERFORMANCE REPORT
ESTCP Project: ER-0009 (BAFeIII Assay)

TABLE OF CONTENTS

	Page
1.0 EXECUTIVE SUMMARY	1
1.1 BACKGROUND	1
1.2 OBJECTIVES OF THE DEMONSTRATION	1
1.3 REGULATORY DRIVERS	2
1.4 DEMONSTRATION RESULTS	2
1.5 STAKEHOLDER/END-USER ISSUES	2
2.0 TECHNOLOGY DESCRIPTION	3
2.1 TECHNOLOGY DEVELOPMENT AND APPLICATION	3
2.2 PROCESS DESCRIPTION	4
2.3 PREVIOUS TESTING OF THE TECHNOLOGY	6
2.4 ADVANTAGES AND LIMITATIONS OF THE TECHNOLOGY	6
3.0 DEMONSTRATION DESIGN	9
3.1 PERFORMANCE OBJECTIVES	9
3.2 SELECTION OF TEST SITES	9
3.3 TEST SITE HISTORY/CHARACTERISTICS	10
3.3.1 SUBASE Bangor	10
3.3.2 Fort Lewis	11
3.3.3 NAS Pensacola	11
3.3.4 Elizabeth City	11
3.4 PHYSICAL SET-UP AND OPERATIONS	13
3.5 SAMPLING/MONITORING PROCEDURES	13
3.6 ANALYTICAL PROCEDURES	13
4.0 PERFORMANCE ASSESSMENT	15
4.1 PERFORMANCE DATA	15
4.2 PERFORMANCE CRITERIA	18
4.3 DATA ASSESSMENT	20
4.4 TECHNOLOGY COMPARISON	20
5.0 COST ASSESSMENT	21
5.1 COST REPORTING	21
5.1.1 Purchasing the Test Kit	21
5.1.2 Additional Supplies/Equipment	21
5.1.3 Labor	22
5.1.4 Cost Example	22

TABLE OF CONTENTS (continued)

	Page
5.2	COST ANALYSIS.....23
5.2.1	Cost Drivers23
5.2.2	Sensitivity Analysis.....23
5.2.3	Department of Defense (DoD)-Wide Savings.....24
5.3	COST COMPARISON.....24
5.3.1	Cost Comparison.....24
5.3.2	Cost Basis25
6.0	IMPLEMENTATION ISSUES.....27
6.1	COST OBSERVATIONS.....27
6.2	PERFORMANCE OBSERVATIONS.....27
6.3	SCALE-UP.....27
6.4	OTHER SIGNIFICANT OBSERVATIONS.....27
6.5	LESSONS LEARNED.....27
6.6	END-USER ISSUES28
6.7	APPROACH TO REGULATORY COMPLIANCE AND ACCEPTANCE....28
7.0	REFERENCES.....29
APPENDIX A	POINTS OF CONTACT..... A-1

LIST OF FIGURES

	Page
Figure 1.	BAFeIII Assay Kit..... 3
Figure 2.	BAFeIII Assay Kit Procedure..... 5
Figure 3.	Soil Sample Allocation and Analysis. 14
Figure 4.	Intralaboratory Replicate Precision for BAF _e III Assay..... 15
Figure 5.	Interlaboratory Replicate Precision for BAF _e III Assay..... 16
Figure 6.	Summary of Iron Oxide Analytical Results..... 17

LIST OF TABLES

	Page
Table 1.	Performance Objectives and Results for the BAF _e III Assay..... 2
Table 2.	Advantages and Limitations of the BAF _e III Assay..... 6
Table 3.	Other Methods for BAF _e III Measurement. 8
Table 4.	Performance Objectives for BAF _e III Assay. 9
Table 5.	Component Loadings..... 16
Table 6.	Iron Mass Balance for Elizabeth City Fuel Farm. 18
Table 7.	Expected Performance and Performance Confirmation Methods for BAF _e III Assay..... 19
Table 8.	BAFeIII Assay Costs. 23
Table 9.	BAFeIII Cost Scenarios. 24

ACRONYMS AND ABBREVIATIONS

AHDS	anthraquinol disulfonate
AQDS	anthraquinone disulfonate
ASTM	American Society for Testing Materials
AOFE	ammonium oxalate extractable iron
BAFeIII	bioavailable ferric iron
BET	Brunauer-Emmett-Teller
bgs	below ground surface
BTEX	benzene-toluene-ethylbenzene-xylenes
BrY	<i>Shewanella alga</i> BrY
CDB	citrate dithionite bicarbonate
CDBFe	citrate dithionite bicarbonate extractable iron
cDCE	<i>cis</i> -Dichloroethene
CDM	Camp Dresser & McKee Inc.
CDMBAFeIII	bioavailable ferric iron measured by CDM
C _E	extract concentration
CFR	Code of Federal Regulations
DCE	dichloroethene
DoD	Department of Defense
EAB	enhanced anaerobic biodegradation
EGDY	East Gate Disposal Yard
EPA	Environmental Protection Agency
EPA/Ada	Environmental Protection Agency, Subsurface Remediation Division, National Risk Management Research Laboratory, Ada, Oklahoma
EPA/Athens	Environmental Protection Agency, Ecosystems Research Division, National Exposure Research Laboratory, Athens, Georgia
EPABAF _{III}	bioavailable ferric iron measured by EPA/Ada
ESTCP	Environmental Security Technology Certification Program
Fe	iron
FeII	ferrous iron
FeIII	ferric iron
FeRB	iron-reducing bacteria
Fort Lewis	Fort Lewis Logistics Center near Tillicum, Washington
FRTR	Federal Remediation Technologies Roundtable
g/kg	grams per kilogram
GIT	Georgia Institute of Technology
HCl	hydrochloric acid

ACRONYMS AND ABBREVIATIONS (continued)

HRC	Hydrogen Release Compound™
MFEBRY	microcosm reducible ferric iron with BrY
MFEBRYFEOOH	microcosm reducible ferric iron with BrY/FeOOH
MNA	monitored natural attenuation
msl	mean sea level
MTBE	methyl tertiary butyl ether
N	number of samples
NAS Pensacola	Naval Air Station in Pensacola, Florida
NAVFAC	Naval Facilities Engineering Command
NFESC	Naval Facilities Engineering Services Center
NHD	New Horizons Diagnostics Corporation
OU8	Operable Unit 8
PCA	principal components analysis
PCE	perchloroethylene
PWIA	Public Works Industrial Area
RABITT	reductive anaerobic in situ treatment technology
RMMAG	electron microprobe analysis, relative mass percent magnetite
RPD	relative percent difference
SBIR	Small Business Innovative Research
SCEC	Support Center, Elizabeth City
SPLP	synthetic precipitation leaching procedure
SUBASE Bangor	Bangor Naval Submarine Base in Kitsap County, Washington
SVOC	semivolatile organic compound
T ₀	time 0 days
T ₃₀	time 30 days
TCE	trichloroethene
TCLP	toxicity characteristic leaching procedure
TEAP	terminal electron accepting process
TFe	total iron
UC	University of Colorado
USAF	U.S. Air Force
USCS	Unified Soil Classification System
USGS	U.S. Geological Survey
V05FeII	0.5N HCl extractable ferrous iron
V05FeIII	0.5N HCl extractable ferric iron
V05FeTOT	0.5N HCl extractable total iron

ACRONYMS AND ABBREVIATIONS (continued)

V6FeII	6N HCl extractable ferrous iron
V6FeIII	6N HCl extractable ferric iron
V6FTOT	6N HCl extractable total iron
VC	vinyl chloride
VOC	volatile organic compound
ZHE	zero headspace extraction

ACKNOWLEDGEMENTS

This report describes the demonstration and validation of a novel analytical technology—a bioavailable ferric iron (BAFeIII) assay. Demonstration and validation of the BAFcIII assay was conducted at four Department of Defense (DoD) installations.

Camp Dresser & McKee Inc. (CDM), in cooperation with the Naval Facilities Engineering Services Center (NFESC), was the principal investigator. Several organizations assisted in the validation of the BAFcIII assay, including the Environmental Protection Agency (EPA), U.S. Geological Survey (USGS), Georgia Institute of Technology (GIT), and University of Colorado (UC). The following individuals contributed to the completion of this project:

Carmen Lebron (PI)	NFESC
Barbara Sugiyama	NFESC
Patrick Evans, Ph.D.	(Co-PI) CDM
Mary Trute	CDM
Roger Olsen, Ph.D.	CDM
Rick Chappell, Ph.D.	CDM
John Wilson, Ph.D.	EPA/Ada
Cherri Adair	EPA/Ada
Eric Weber, Ph.D.	EPA/Athens
John Kenneke, Ph.D.	EPA/Athens
B.T. Thomas, Ph.D.	EPA/Athens
Tom DiChristina, Ph.D.	GIT
John Drexler, Ph.D.	UC

This work also would not have been possible without access to and help from the following DoD installations:

SUBASE Bangor, Washington
Fort Lewis, Washington
NAS Pensacola, Florida
U.S. Coast Guard Support Center, Elizabeth City, North Carolina

Points of contact for this project are provided in Appendix A.

Technical material contained in this report has been approved for public release.

This page left blank intentionally.

1.0 EXECUTIVE SUMMARY

1.1 BACKGROUND

CDM invented and developed a bioavailable ferric iron (BAFeIII) assay with funding from the U.S. Air Force (USAF). This is a standardized bioassay that directly measures the concentration of BAFeIII in soil or sediment. A BAFeIII test kit based on the assay is manufactured by New Horizons Diagnostics Corporation (NHD) of Columbia, Maryland.

BAFeIII is defined as ferric iron (FeIII) that is capable of being reduced by microorganisms that oxidize another chemical species and derive energy from the electron transfer.

BAFeIII is an important terminal electron acceptor with significant assimilative capacity in many natural environments. Dissolved ferrous iron (FeII) in groundwater is typically measured to assess FeIII reduction and calculate assimilative capacity, but this measurement underestimates this terminal electron accepting process (TEAP) because most FeII remains bound to the soil. Dissolved FeII also gives no indication of the amount of FeIII present in aquifer soil that is bioavailable. BAFeIII in the soil must be measured in order to quantify the true assimilative capacity of an aquifer.

Iron-reducing bacteria (FeRB) use and are dependent on BAFeIII. FeRB are known to oxidize or mineralize various organic compounds, such as benzene, toluene, vinyl chloride (VC), and methyl tertiary butyl ether (MTBE). Continued activity over a period of years is dependent on the presence of sufficient BAFeIII.

BAFeIII can also affect reductive dechlorination in monitored natural attenuation (MNA) and enhanced anaerobic biodegradation (EAB) applications. BAFeIII can result in trichloroethene (TCE) being reductively dechlorinated to *cis*-Dichloroethene (cDCE) only, and further reductive dechlorination can be inhibited (AFCEE, 2004). Thus, knowledge of the BAFeIII concentration can indicate the potential for incomplete reductive dechlorination of TCE. It can also be used for planning EAB remedies. If the BAFeIII concentration is sufficient to inhibit cDCE reductive dechlorination, reductive dechlorination of TCE to cDCE and VC followed by oxidative biodegradation of VC and possibly cDCE under iron-reducing conditions may be a better approach.

1.2 OBJECTIVES OF THE DEMONSTRATION

The overall objective of this project was to demonstrate and validate the performance of the BAFeIII assay as an analytical technology for use in supporting bioremediation. Specific objectives were to:

- Validate the BAFeIII assay method using a combination of confirmatory analyses conducted by the EPA (EPA/Subsurface Remediation Division, National Risk Management Research Laboratory, Ada, Oklahoma [EPA/Ada] and EPA/Ecosystems Research Division, National Exposure Research Laboratory, Athens, Georgia [EPA/Athens]), the GIT, and the UC.
- Quantify costs associated with the technology.

1.3 REGULATORY DRIVERS

Analysis of BAF_{Fe}III is not required at this time and is considered optional by regulatory agencies. Additionally, no method for BAF_{Fe}III has been approved by the EPA since it does not approve methods for unregulated compounds. The analyte (BAF_{Fe}III) of interest in this demonstration is discussed in the EPA technical guidance on MNA and EAB of chlorinated solvents (U.S. EPA, 1998; AFCEE, 2004). These documents review the use of BAF_{Fe}III data to assess MNA of organic contaminants such as VC and consumption of injected electron donors during EAB.

1.4 DEMONSTRATION RESULTS

Table 1 presents validation results and indicates that the BAF_{Fe}III assay is a precise analytical method for direct BAF_{Fe}III quantification.

Table 1. Performance Objectives and Results for the BAF_{Fe}III Assay.

Type of Performance Objective	Primary Performance Criteria	Expected Performance (Metric)	Actual Performance Objective Met?
Qualitative	Relationship between BAF _{Fe} III assay and degree of iron oxide crystallinity/surface area	Positive association	Yes
	Relationship between BAF _{Fe} III assay and confirmatory analyses	Positive association	Yes
	Range of BAF _{Fe} III assay relative to other analytical techniques	Similar or better range	Yes
	Sample throughput of BAF _{Fe} III assay	Labor time ≤ similar methods	Yes
	Versatility of BAF _{Fe} III assay	Consistent performance	Yes
Quantitative	Intra-laboratory precision of BAF _{Fe} III assay based on soil and laboratory replicates	Absolute RPD ≤ 35	Yes
	Inter-laboratory precision of BAF _{Fe} III assay based on replicates analyzed by both CDM and EPA/Ada	-35 ≥ RPD ≤ 35	Yes

1.5 STAKEHOLDER/END-USER ISSUES

The BAF_{Fe}III assay is an important tool that allows remedial project managers to obtain a more accurate and complete picture of site geochemistry and microbiology. This tool is useful in bioremediation projects involving MNA and EAB. Use of the direct BAF_{Fe}III assay is recommended as a replacement for indirect chemical extraction methods. Additionally, it is recommended that BAF_{Fe}III analysis of soil be conducted in addition to FeII analysis in groundwater. The BAF_{Fe}III assay purchase cost ranges from \$50 to \$75 each, depending on the quantity purchased. Additional equipment, supplies, and labor are required, and the estimated analysis cost was calculated to be \$212 each, based on the analysis of six samples. BAF_{Fe}III analysis conducted by a commercial laboratory has been quoted at \$250 per analysis.

2.0 TECHNOLOGY DESCRIPTION

2.1 TECHNOLOGY DEVELOPMENT AND APPLICATION

Figure 1 is a picture of the BAF_{Fe}III test kit which is manufactured by NHD of Columbia, Maryland. The BAF_{Fe}III assay involves addition of a soil sample to a test tube that contains the lyophilized iron-reducing bacterium *Shewanella alga* BrY, lactate as an electron donor, and a mineral salts medium supplemented with reagents that accelerate the assay.



Figure 1. BAF_{Fe}III Assay Kit.

The BAF_{Fe}III assay can be used for site characterization and monitoring in MNA and EAB applications. Natural attenuation of benzene-toluene-ethylbenzene-xylenes (BTEX) is one common example. Initial site characterization for MNA involves the calculation of assimilative capacity of an aquifer for biodegradation of BTEX. The BAF_{Fe}III assay can be used to estimate the assimilative capacity in the aquifer material for BTEX biodegradation. These results can be used to determine the mass of BTEX that has been degraded previously and the potential for future BTEX biodegradation.

BAF_{Fe}III can also affect reductive dechlorination in MNA and EAB applications. Reductive dechlorination is based on chlorinated compounds such as TCE serving as a terminal electron acceptor. Complete dechlorination of TCE to ethene requires that each dechlorination product (i.e., cDCE and VC) also serve as terminal electron acceptors. Terminal electron acceptors will be used preferentially according to thermodynamic and kinetic considerations. For example, VC may be dechlorinated to ethene under methanogenic conditions (and correct microbial populations) but not under aerobic or denitrifying conditions, in part because the free energies for reduction of oxygen and nitrate are greater (i.e., more negative) than for reduction of VC. The free energy for reduction of several BAF_{Fe}III oxides is greater than that for reductive dechlorination of cDCE to VC (Evans and Koenigsberg, 2001). BAF_{Fe}III can result in TCE being reductively dechlorinated to cDCE only and further reductive dechlorination can be

inhibited (AFCEE, 2004). Thus knowledge of the BAF_{Fe}III concentration can indicate the potential for incomplete reductive dechlorination of TCE. It can also be used for planning EAB remedies. If the BAF_{Fe}III concentration is sufficient to inhibit cDCE reductive dechlorination, reductive dechlorination of TCE to cDCE and VC followed by oxidative biodegradation of VC and possibly cDCE under iron-reducing conditions may be a better approach.

T₀

T₃₀

Reagent A

BrY (Reagent B)

A challenge in applying BAF_{Fe}III results is that there is insufficient experience to use the results in quantitative models at this time. Nevertheless, the results from the assay can be used in either a quantitative or qualitative manner. The BTEX example above represents a quantitative application of BAF_{Fe}III assay results. The enhanced anaerobic bioremediation application represents a qualitative application of the assay. Experience using the assay results in a qualitative fashion will lead to more quantitative applications as a database is developed. An example of a potential application is incorporation of BAF_{Fe}III as a variable in biodegradation computer modeling programs such as the EPA program BIOPLUME IV, which is currently being beta-tested (John Wilson, personal communication). BIOPLUME is a two-dimensional, finite difference model for simulating the natural attenuation of organic contaminants in groundwater due to the processes of advection, dispersion, sorption, and biodegradation. The BIOPLUME program uses a USGS solute transport code and kinetic equations to determine the fate and transport of the organic contaminants and the electron acceptors (dissolve oxygen, nitrate, BAF_{Fe}III, sulfate, and carbon dioxide) and the reaction by-products (including dissolved FeII). BioRedox-MT3DMS is another numerical fate and transport model that includes BAF_{Fe}III as an input parameter (Thompson et al, 2004).

2.2 PROCESS DESCRIPTION

The procedure for the BAF_{Fe}III assay is graphically illustrated in Figure 2 and includes the following steps following homogenization:

- Two 5-gram samples are placed into each of two 25-mL assay tubes labeled “T₀” (time 0 days) and “T₃₀” (time 30 days).
- The T₀ tube, which is used to determine the initial or ambient concentration of FeII present in the soil immediately following sample collection, contains no reagents or BrY, is filled with distilled water and 1 mL concentrated hydrochloric acid (HCl), capped, then placed on a tube rotator for 48 hours, during which time weakly associated FeII is extracted from the soil.
- Following the extraction period, the T₀ extract liquid is filtered, if necessary, and analyzed for initial FeII.


- The T₃₀ tube is filled with distilled water plus the assay reagents, capped, mixed by hand, and then incubated in the dark at room temperature for 30 days. During the incubation period, the FeRB (i.e., *Shewanella alga* [BrY]) consume lactate and reduce BAF_{III} to FeII.
- Following the incubation period, 1 mL of liquid is withdrawn from the T₃₀ tube, discarded, replaced with 1 mL concentrated HCl to create a 0.5 mL HCl solution; then the tube is placed on a tube rotator for 48 hours, during which time both initial FeII and FeII produced by BAF_{III} reduction are solubilized.
- Following the extraction period, the T₃₀ liquid is filtered and analyzed for FeII.
- The concentration of FeII in the T₃₀ extract liquid is the total FeII—the sum of ambient FeII (T₀ tube) and BAF_{III}. The following formula is used to calculate BAF_{III}:

$$\text{BAFeIII}(\text{mg/kg}) = \frac{(C_E \text{ in } T_{30}) - (C_E \text{ in } T_0)}{217F_S}$$

C_E is the measured concentration of FeII in the extract liquid (mg/L) and F_S is the solids fraction (g dry soil/g wet soil).

- Extract FeII concentrations (C_E) are measured using a Hach test kit (Hach Company, Method 8146) followed by dilution. Dilution requirements are determined using Quantofix® Iron 1000 test strips (VWR Part No. 60787-724) without the Iron 1 reagent.

Step 1

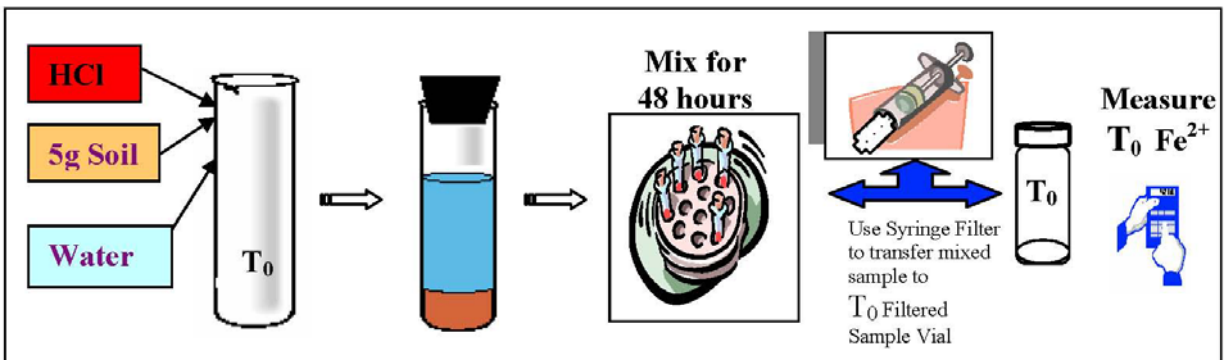

Step 2

SECOND PART OF FIGURE UNUSABLE

Figure 2. BAF_{III} Assay Kit Procedure.

2.3 PREVIOUS TESTING OF THE TECHNOLOGY

Initial development and preliminary field testing of the BAF_eIII assay technology was conducted under a Phase I Small Business Innovative Research (SBIR) grant from the USAF (Evans, 1997; Evans, 2000). Further development and field-testing of the technology was conducted under Phase II of the SBIR, which led to development of a field test kit (Evans and Jones, 1999; Evans et al., 1999).

2.4 ADVANTAGES AND LIMITATIONS OF THE TECHNOLOGY

Advantages and limitations of the BAF_eIII assay are summarized in Table 2 and described in detail below.

Table 2. Advantages and Limitations of the BAF_eIII Assay.

Category	Advantages	Limitations
Analytical Methodology	Direct method that uses a bioassay rather than an indirect chemical extraction	Bacteria must be stored frozen prior to use
	Facultative bacterium used that does not need to be stored anaerobically	Uses <i>Shewanella alga</i> BrY, which may not be representative of all sites
	Assay composition and method standardized	30-day incubation time
Sampling Requirements	Frequent sampling not necessary	Requires soil or sediment samples and invasive sampling for their procurement
	Requires 5 grams of soil per analysis	
Technology Application	Indicates BAF _e III electron donor demand for MNA and EAB applications	No reference method for BAF _e III analysis
	Analysis more robust than commonly used chemical extraction methods	Can give maximum values for BAF _e III because of presence of electron shuttles in assay reagent

BAF_eIII data allow site managers and regulators to evaluate MNA and EAB at sites more completely and accurately than with dissolved FeII data alone. In the case of BTEX natural attenuation, dissolved FeII data allow calculation of the mass of BTEX that has been biodegraded historically and is being biodegraded currently. BAF_eIII data allow calculation of the mass of BTEX that will be biodegraded in the future. It is impossible to calculate future potential for BTEX biodegradation using dissolved FeII data alone. Furthermore, since most dissolved FeII remains bound to the soil, the historical and current mass of biodegraded BTEX is underestimated using dissolved FeII data for electron acceptor calculations. Completion of a mass balance and subsequent understanding of contaminant source fate is dependent on accurate electron acceptor calculations. In the case of EAB of TCE, BAF_eIII data allow determination of the total electron donor demand. High electron donor demand can decrease the likelihood that TCE will be reductively dechlorinated beyond cDCE to VC and ethene upon addition of an electron donor such as molasses, lactic acid, vegetable oil, or Hydrogen Release Compound™ (HRC) (Evans and Koenigsberg, 2001; AFCEE, 2004). High electron donor demand can also prevent complete reductive dechlorination under MNA conditions. Dissolved FeII data alone give no indication of this electron donor demand.

While the BAF_eIII assay provides these advantages over measurement of dissolved FeII, it does depend on soil sampling in the saturated zone, which is costly and inconvenient for routine sampling. On the other hand, measurement of BAF_eIII in soil likely does not require quarterly

sampling of numerous locations. This decreased sampling frequency can minimize the additional cost associated with soil sample collection.

The BAF_{FeIII} assay evaluated in this report is in a sense a standardized bioassay. Besides being the first of its kind, the assay has many advantages that make it an easy-to-use and reliable analytical tool. Unlike laboratory-based microcosm studies, it is standardized, self-contained, portable, packaged for field or laboratory use, and includes lyophilized FeRB that are relatively stable. Care must be taken to store the lyophilized FeRB under freezing conditions for stability. The bioassay reagents other than FeRB are packaged separately from the FeRB and are stable at room temperature. These chemical components are present at optimal levels and are known to influence bioavailability. Their presence is intended to provide reproducible, standardized, and direct estimates of the maximum concentration of BAF_{FeIII} in a given soil sample. Recognition that the assay results are maximum values should be considered when using the data. For example, the amount of electron donor required to overcome iron reduction alone in an EAB scenario may be less than predicted, based on BAF_{FeIII} assay results.

A potential limitation of the BAF_{FeIII} assay is that the indigenous FeRB may be different in their iron-reducing capabilities when compared to the strain used in the assay (i.e., *Shewanella alga* BrY). Inclusion of BrY in the assay was intended to make the assay standardized and reproducible. Additionally, since BrY is a facultative microorganism, storage under anaerobic conditions is not necessary, further increasing the test kit's ease-of-use. BAF_{FeIII} is an operationally defined analyte (i.e., the measured value of the analyte is dependent on the method used for its analysis) and use of BrY is part of this operational definition. The BrY-based assay yields a reproducible maximum value of BAF_{FeIII} in a given sample. The decision whether or not to use BrY in the bioassay represents a trade-off of obtaining site-specific results versus standardization, reproducibility, and ease-of-use. If results using only indigenous bacteria are desired, the BrY culture can easily be left out of the assay since it is packaged separately. Iron reduction would then be accomplished via FeRB that are indigenous to the soil sample used in the assay. A new limitation would be introduced by conducting the assay in this manner, however, since the required incubation time would be unknown. Monitoring of the assay over time would be required, which would decrease the ease-of-use of the assay. Direct comparison of BAF_{FeIII} results to results for other sites would also not be possible. In addition to BrY, electron shuttles (i.e., humic acids and anthraquinone disulfonate [AQDS]) are included in the assay. The inclusion of electron shuttles is also part of the operational definition. Their inclusion increases the reliability and speed of the assay and also can result in determination of maximum BAF_{FeIII} values.

Another potential limitation of the BAF_{FeIII} assay involves the 1-month incubation time. However, considering that standard turnaround time for most analytical laboratories is 2 weeks, this time requirement is acceptable in most cases.

Finally, no standardized technologies exist for directly measuring BAF_{FeIII}. Other methods that have been used or evaluated for BAF_{FeIII} measurement are presented in Table 3 and discussed below.

Table 3. Other Methods for BAF_eIII Measurement.

Category	Method	Advantages	Limitations
Chemical Extraction	<ul style="list-style-type: none"> • 0.5 N HCl • 6 N HCl • Hydroxylamine HCl • Citrate dithionite bicarbonate (CDB) • Ammonium oxalate 	<ul style="list-style-type: none"> • Easy to use • Inexpensive 	<ul style="list-style-type: none"> • Indirect • Indicates chemical extractability rather than bioavailability • Does not accurately represent true bioavailability of different crystalline phases
Redox Titration	<ul style="list-style-type: none"> • AHDS titration 	<ul style="list-style-type: none"> • Data indicate good correlation with microcosms 	<ul style="list-style-type: none"> • Not commercially available • Requires anaerobic conditions
Sophisticated Instrumentation	<ul style="list-style-type: none"> • Electron microscopy • Electron microprobe • X-ray diffraction • Near infrared spectrophotometry • Mössbauer spectroscopy 	<ul style="list-style-type: none"> • Potential identification of specific crystalline phases 	<ul style="list-style-type: none"> • Expensive • Some methods are insufficiently sensitive
Treatability Study	<ul style="list-style-type: none"> • Microcosm 	<ul style="list-style-type: none"> • Potentially the best simulation of actual site geochemistry and microbiology 	<ul style="list-style-type: none"> • Expensive • Not standardized

Chemical extraction, sophisticated instrument-dependent methods, and microcosm studies have been evaluated, but each has significant disadvantages. Selective extraction using a variety of extractants, including various concentrations of HCl, hydroxylamine-HCl, ammonium oxalate, citrate, CDB and other compounds has been used to attempt to quantify BAF_eIII. However, these extractants do not provide direct measurements and do not necessarily correlate to the concentration of BAF_eIII (Lovley and Phillips, 1987). Also, extraction methods do not take into account the effect of groundwater chemistry on bioavailability. A laboratory method for BAF_eIII quantitation involving redox titration of soil with the reduced form of AQDS, also known as anthraquinol disulfonate (AHDS) has been evaluated (Hacherl et al, 2001). This method is not readily available. Sophisticated instrumentation, including electron microscopy, electron microprobe analysis, near infrared spectrophotometry, and Mössbauer spectroscopy have been evaluated but are not especially useful. Furthermore, these techniques are expensive and not readily available. Microcosm studies have been conducted in various laboratories but with different methods and media. While microcosm studies are a direct approach to evaluation of BAF_eIII, no standard method exists for conducting them; they are also time-consuming and expensive. Therefore, the major advantage of the BAF_eIII assay over other methods is that it is a standardized and direct measurement of BAF_eIII.

3.0 DEMONSTRATION DESIGN

3.1 PERFORMANCE OBJECTIVES

The BAF_{FeIII} assay is difficult to validate because no standard method exists to measure bioavailability of Fe^{III}. Nevertheless, performance criteria were developed a priori in order to be able to validate the BAF_{FeIII} assay. These criteria were based initially on the demonstrated relationship between Fe^{III} bioavailability and Fe^{III} oxide particle surface area (Roden and Zachara, 1996). Different Fe^{III} oxides ranging from amorphous ferric oxyhydroxide to various crystalline forms have different specific surface areas. Oxides with greater specific surface area (amorphous oxides having the greatest) have been shown to be more bioavailable for iron reduction (Roden and Zachara, 1996), so the initial working hypothesis of the evaluation was that the BAF_{FeIII} concentration determined by the assay should correlate to the specific surface area of the oxide particles in a soil sample. In addition, other factors associated with groundwater may influence Fe^{III} bioavailability (Evans, 2000; Roden and Urrutia, 2002) including pH, specific conductivity, divalent cations, electron shuttles such as humic acids, chelators, and adsorbed anions, including Fe^{II}. Performance objectives for the demonstration were based in part on these multiple factors and are presented in Table 4.

Table 4. Performance Objectives for BAF_{FeIII} Assay.

Type of Performance Objective	Primary Performance Criteria	Expected Performance (Metric)	Actual Performance Objective Met?
Qualitative	Relationship between BAF _{FeIII} assay and degree of iron oxide crystallinity/surface area	Positive association	Yes
	Relationship between BAF _{FeIII} assay and confirmatory analyses	Positive association	Yes
	Range of BAF _{FeIII} assay relative to other analytical techniques	Similar or better range	Yes
	Sample throughput of BAF _{FeIII} assay	Labor time ≤ similar methods	Yes
	Versatility of BAF _{FeIII} assay	Consistent performance	Yes
Quantitative	Intralaboratory precision of BAF _{FeIII} assay based on soil and laboratory replicates	Absolute RPD ≤ 35	Yes
	Interlaboratory precision of BAF _{FeIII} assay based on replicates analyzed by both CDM and EPA/Ada	-35 ≥ RPD ≤ 35	Yes

3.2 SELECTION OF TEST SITES

Selection of sites was based on the following criteria:

- Availability of an existing groundwater monitoring well network
- Geological and hydrogeological characteristics
- TEAP occurring in the aquifer

- Concentrations of parent compounds and presence of daughter products
- Groundwater chemistry
- Ability to drill on site
- Availability and quality of existing site characterization documentation.

The objective was to select sites that offered a range of iron concentrations, geochemical characteristics, and TEAP to enable validation of the BAF_{FeIII} assay. Four test sites were used for the demonstration of the BAF_{FeIII} assay:

- Bangor Naval Submarine Base in Kitsap County, Washington (SUBASE Bangor)—dissolved petroleum hydrocarbons and chlorinated volatile organic compounds (VOC).
- Fort Lewis Logistics Center near Tillicum, Washington (Fort Lewis)—chlorinated VOCs.
- Naval Air Station in Pensacola, Florida (NAS Pensacola)—chlorobenzene and TCE.
- U.S. Coast Guard Support Center in Elizabeth City, North Carolina—fuel farm site with petroleum hydrocarbons and MTBE and North Beach site with chlorinated hydrocarbons.

3.3 TEST SITE HISTORY/CHARACTERISTICS

Summaries of the four demonstration sites are provided in this section. Additional details are available in the Technology Demonstration Plan (CDM, 2001) and the Final Report (NAVFAC, 2005).

3.3.1 SUBASE Bangor

The study area for this demonstration is the vicinity of Operable Unit 8 (OU8), located in the Public Works Industrial Area (PWIA) of SUBASE Bangor. SUBASE Bangor is located near the town of Silverdale, Washington. An onsite underground storage tank is believed to be the source of a release of unleaded gasoline into the surrounding media between 1982 and 1986. In 1986, soil vapor extraction/air system and product recovery were implemented to clean up the site. To date, liquid petroleum hydrocarbons remain in several monitoring wells at the PWIA (EA, 2000). Chlorinated VOCs are also present in site groundwater (EA, 2000).

Geological conditions at OU8 at SUBASE Bangor have been highly characterized by drilling and monitoring well installation. The area consists of four stratigraphic units: construction fill, Vashon till (Qvt), Vashon Advance Outwash (Qva), and Lawton Clay. The construction fill can be found 2 to 3 ft below ground surface (bgs) and consists of a sandy material. Underlying the construction fill and ranging to a depth of about 45 ft bgs is the Vashon till, which consists of silt, sand, gravel, and cobbles. This unit is 20 to 40 ft thick. The Vashon Advance Outwash (location of the shallow aquifer) is beneath the Vashon till and consists of sand, silt, and gravel.

The thickness of the Vashon Advance Outwash is about 100 to 130 ft. Beneath the Vashon Advance Outwash is the Lawton Clay aquitard. A silty transition zone in the bottom of the Vashon Advance Outwash separates the shallow aquifer from the lower aquitard.

3.3.2 Fort Lewis

The study area for this demonstration is the vicinity of the East Gate Disposal Yard (EGDY) of the Fort Lewis, located south of Tacoma, Washington. The EGDY, which is situated at the northwest corner of the base, originally was used for storage and disposal of various solid and liquid waste products. Since 1982, studies have been conducted at the EGDY to verify and delineate contamination at the site. Affected media were soil and groundwater, with the prominent contaminant being TCE (Battelle, 2000).

The upper portion of the EGDY at Fort Lewis consists of a brown to black alluvial sand and gravel matrix with local lenses of silts. The material gets coarse with depth. Underlying this formation at about 260 ft mean sea level (msl) is the Vashon Till, which is a complex mixture of silt, sand, and clay. The Vashon Till has low permeability and serves as a barrier between the upper and deeper aquifers. At the source area, the groundwater can be encountered between 8 and 15 ft bgs. Farther downgradient the groundwater is generally between 10 and 35 ft bgs. The upper aquifer is unconfined and mostly anaerobic. Groundwater flow is generally west to northwest. There are more than 80 monitoring wells and piezometers on site.

Battelle Memorial Institute (in cooperation with the Air Force Research Laboratory, USGS, EPA, and Cornell University) performed reductive anaerobic in situ treatment technology (RABITT) at the EGDY of Fort Lewis, and further site characterization details can be found in their report (Battelle, 2000). The BAF_{Fe}III demonstration was done in the vicinity of the RABITT demonstration.

3.3.3 NAS Pensacola

The study area for this demonstration is the vicinity of the wastewater treatment plant at NAS Pensacola, located near Pensacola Bay in the far northwest corner of the state (USGS, 1999).

The area predominantly consists of marine and fluvial terrace deposits ranging from fine- to medium-grained sands, silts, clays, and gravel. The site has two aquifers, a shallow aquifer and a deeper confined aquifer (referred to as the underlying main producing zone). There is a 20-ft-thick confining barrier of low-permeable silts and clays that separate the upper and lower aquifers. The upper aquifer is composed of fine- to medium-grained sands. The main producing zone is used locally as a water supply and consists of permeable sands and gravel. Two plumes have been identified at the site, one comprised of chlorinated ethenes and the other chlorinated benzenes. Most of the contaminants on site are located in the upper aquifer region. The depth of contamination ranges from 20 to 40 ft bgs.

3.3.4 Elizabeth City

The U.S. Coast Guard Support Center in Elizabeth City, North Carolina, is located on the southern bank of the Pasquotank River. Two separate areas at the site were used in this

demonstration, the fuel farm area (petroleum hydrocarbon) and the North Beach area (chlorinated VOCs).

The following description of the fuel farm area was obtained from the report by Wilson et al (2000). The former fuel farm was located south of a concrete ramp used to recover seaplanes from the Pasquotank River. A plume of MTBE and fuel hydrocarbons in ground water emanates from a source area in the location of the former fuel farm and flows under the concrete ramp toward the Pasquotank River to the north, and toward a drainage canal along the western side of the seaplane ramp. This source area corresponds to the former location of fuel storage tanks on the site. Fuel was stored at the site until December 31, 1991. The fuel farm had been in use since 1942 and originally consisted of a 50,000-gallon concrete underground storage tank and two steel underground storage tanks with a volume of 12,000-gallons and 15,000-gallons, respectively. The steel tanks were apparently removed in the mid-1980s. In addition to the underground storage tanks, two steel, aboveground storage tanks with a capacity of 50,000 gallons were installed in the mid-1980s. There was evidence of corrosion in the transfer lines from these tanks. They were taken out of service and removed from the site. No evidence of a release from the pipes was discovered. The U.S. Coast Guard began a free product recovery effort at the site in September 1990. Eight recovery wells were arranged around the source area in a circle. By March 1992, a total of 79,000 gallons of fuel was recovered.

The following description of the North Beach Disposal Area was provided by ARCADIS (2004). The North Beach Disposal Area occupies 4.8 acres in the northeast corner of the Support Center, Elizabeth City (SCEC). The site is bounded immediately north and west by the Pasquotank River and to the east by a drainage canal. The North Beach site is unpaved and approximately half of the site is heavily wooded. The other half, where most of the disposal activities may have occurred, consists of grass-covered open areas. Historical information and site investigation activities indicate that industrial wastes generated at the SCEC may have been buried at the North Beach Disposal Area. The exact quantity and nature of the wastes disposed of in the North Beach Disposal Area are unknown; however, it is suspected that the wastes may have included chlorinated solvents, batteries, petroleum wastes, scrap metals, paint sludges, and plating wastes. Disposal activities likely occurred from the 1940s to approximately 1975. Four separate areas of concern (i.e., Source Areas 1, 2, 3, and 4) were identified at the site and had elevated concentrations of metals, scrap-metal fragments, VOCs, and semivolatile organic compounds (SVOC) in soil. Only perchloroethylene (PCE), TCE, cis-1,2-dichloroethene (DCE), VC, and pentachlorophenol are present in groundwater at elevated concentrations.

HRC, a food-grade polylactate ester, was injected into the shallow aquifer zone at multiple points near Source Area 2 of the North Beach Disposal Area from January 21 to 25, 2003. The treatment area for HRC injection is a grid approximately 40 ft wide by 100 ft long, encompassing Monitor Wells GP20, GM315, GM330, and GM360. Within the grid area, standard HRC was injected into 40 points while HRC primer was injected into nine points. A total of 5,545 pounds of HRC was injected across the grid, with between 110 and 135 pounds of standard HRC or primer injected at each point. The depths for these injections were 5 ft bgs to 45 ft bgs within the primary interval impacted by chlorinated VOCs. Quarterly monitoring has been conducted for one year since the HRC injections. Results indicate that HRC does not

appear to have significant influence on groundwater geochemistry beyond the immediate vicinity of the injection points within the grid.

3.4 PHYSICAL SET-UP AND OPERATIONS

On-site operations involved collecting and packaging samples as described in Section 3.5. Site visits were conducted as follows:

Site 1 – SUBASE Bangor: January 22 to February 2, 2001

Site 2 – Fort Lewis: February 19 to March 2, 2001

Site 3 – NAS Pensacola: April 29 to May 3, 2002

Site 4 – Elizabeth City: October 23 to 25, 2002

Physical operation and set-up of the BAF_eIII test kit was conducted as described in Section 2.2.

3.5 SAMPLING/MONITORING PROCEDURES

Groundwater samples were collected from existing monitoring wells on each site using low-flow techniques and a peristaltic or bladder pump system. Soil borings were completed for collection of soil samples using hollow-stem auger, direct-push technology, or hand auger. During drilling, a CDM engineer or scientist logged and sampled the borings. The soils were visually described and classified in accordance with the Unified Soil Classification System (USCS) American Society for Testing Materials (ASTM) D2488-84. Generally two sections of each boring were collected, the top and bottom portions. Specific sample locations and depths are presented in the Final Report (NAVFAC, 2005). Attempts were made to obtain different types of soil samples as defined by USCS. The soil from each section was homogenized by hand (mixing with stainless steel spoon in a bowl) and then placed in 4- or 8-ounce glass jars, capped with Teflon™-lined lids, and labeled prior to shipment to the labs. Samples were shipped in coolers with ice to maintain temperature between 2 and 6°C. Soil samples were sent to the CDM laboratory in Bellevue, Washington, for BAF_eIII analysis. Soil samples were also sent to other organizations for analysis as detailed in Figure 3.

3.6 ANALYTICAL PROCEDURES

Figure 3 illustrates the different analyses that were conducted to validate the BAF_eIII assay. Appendices H and I of the Technology Demonstration Plan (CDM, 2001) and Appendix A of the Final Report (NAVFAC, 2005) include detailed analytical procedures that were conducted to demonstrate and validate the BAF_eIII assay. The significance of each analysis relative to BAF_eIII is provided, along with the method description and the organization that conducted the analysis.

Analyses were conducted immediately after sample collection with the following exceptions: BAF_eIII analysis of samples collected from SUBASE Bangor and Fort Lewis were conducted on January 11, 2002, on archived samples, and HCl extractions were repeated in March 2002 using the ferrozine analysis method.

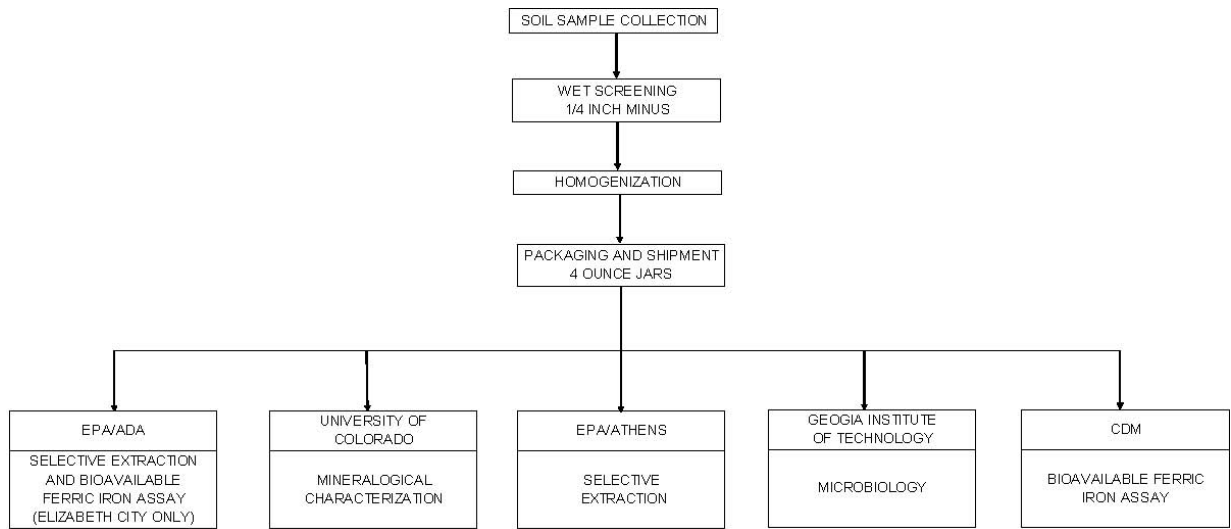


Figure 3. Soil Sample Allocation and Analysis.

4.0 PERFORMANCE ASSESSMENT

4.1 PERFORMANCE DATA

This section presents a brief summary of performance data for the BAF_eIII assay. A more complete description of these data is presented in the Final Report (NAVFAC, 2005).

Replicate analyses were conducted to demonstrate the intralaboratory precision of the BAF_eIII assay. An absolute relative percent difference (RPD) of 35 was used to evaluate the replicate data. This value was selected as an approximate criterion for analyses of replicates of inherently nonhomogeneous soils. Further discussion of the valid use of an RPD of 35 can be found in EPA guidance on analysis of solid matrices (U.S. EPA, 2002). The overall average absolute RPD for the 76 CDM intralaboratory replicates was 29.7, which met the $RPD \leq 35$ criterion, with absolute RPDs for most of the individual replicates (77.6%) also meeting the criterion (Figure 4).

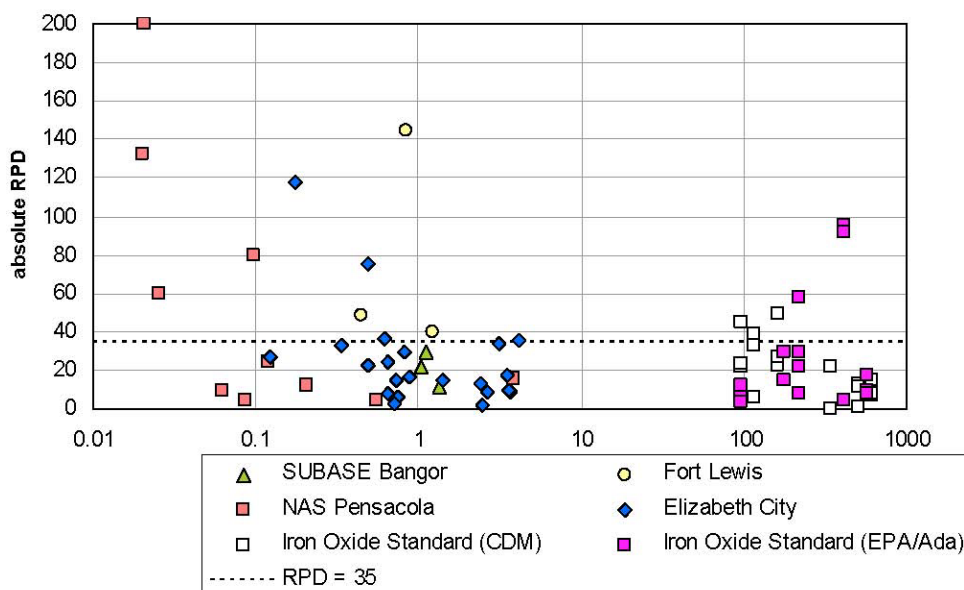


Figure 4. Intralaboratory Replicate Precision for BAF_eIII Assay.

Replicate analyses were also conducted to demonstrate the interlaboratory precision of the BAF_eIII assay. An RPD of 0 was used to evaluate the replicate data. This value was selected to represent no difference between the analyses as conducted by the two laboratories, i.e., a perfect 1:1 correlation and no interlaboratory bias. The overall average RPD for the 40 interlaboratory replicates was 12, which indicated that the CDM results were slightly higher, on average, than the EPA results (Figure 5), but the difference was not statistically significant. The correlation coefficient for the log-transformed data was 0.98. For the aquifer samples, 25% of the samples agreed within a factor of 20%, 50% agreed within a factor of 37%, 75% agreed within a factor of 66%, and all of the samples agreed within a factor of 170%. For the iron oxide samples, 25% of the samples agreed within a factor of 8%, 50% agreed within a factor of 29%, 75% agreed within a factor of 63%, and all the samples agreed within a factor of 160%.

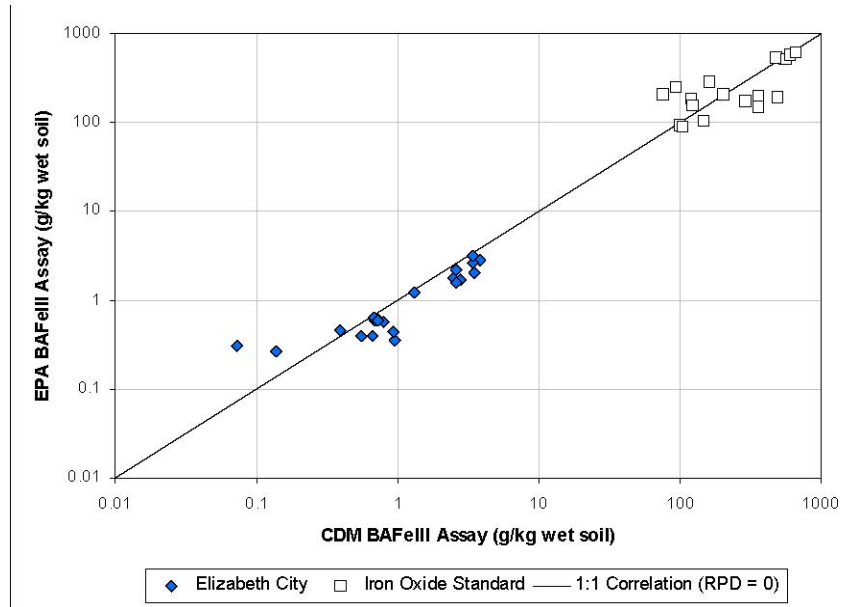


Figure 5. Interlaboratory Replicate Precision for BAFeIII Assay.

Principal components analysis (PCA) was conducted to evaluate the relationships and associations among the various potential bioavailable FeIII factors. PCA is a statistical method of identifying correlations of a large number of variables by grouping interrelated variables into “components.” Results indicated that approximately 43% of the total soil data set variance was explained by the first two components. The correlations between the original variables and the components are referred to as “loadings.” Thus, variables with high loadings in a particular component are associated with each other (i.e., they are intracorrelated). A listing of the variables with loadings greater than 0.45 in the first two components is provided in Table 5 (see Acronyms and Abbreviations, page iv, for definitions).

Table 5. Component Loadings.

Component	Variables with Loadings > 0.45
1	V6FETOT, V6FeII, RMMAG, V6FeIII, V05FETOT, V05FeIII, MFEbRY, V05FeII
2	V6FeIII, V05FETOT, V05FeIII, MFEbRY, AOFE, EPABAFeIII, TFE, CDBFE, MFEbRYFEOOH, CDMBAFeIII

Component 1, which accounted for approximately 22% of the total variance in the data set, contained a number of factors that were associated with each other but not with the BAFeIII assay. Component 1 was concluded to be associated with iron as opposed to BAFeIII. Component 2, which accounted for approximately 20% of the total variance in the data set, contained several of the same variables that loaded highly into Component 1. Component 2 also contained the CDM and EPA BAFeIII assay variables and the confirmatory analyses CDB and ammonium oxalate extractable iron (AOFe), total Fe, and iron oxide (FeOOH)-supplemented microcosm with BrY. Component 2 was concluded to be associated with BAFeIII. These results demonstrated that positive associations exist between the BAFeIII assay and confirmatory analyses that are related to and indicative of BAFeIII.

Figure 6 shows, for the synthetic iron oxides, iron concentrations measured using the BAF_{FeIII} assay, microcosms, and chemical extractions, all being expressed as fractions of total iron concentrations. The results for the BAF_{FeIII} assays conducted by CDM and EPA were qualitatively similar to results of microcosms conducted with *Shewanella alga* BrY. Results for the chemical extractions were qualitatively different from the BAF_{FeIII} assay results. These data demonstrate the BAF_{FeIII} assay yields a more representative estimate of iron oxide bioavailability than do chemical extractions.

CDM and EPA BAF_{FeIII} assay results for 6-line ferrihydrite, lepidocrocite, and magnetite were not significantly different (p values ranged from 0.28 to 0.48). CDM and EPA BAF_{FeIII} assay results for 2-line ferrihydrite and hematite were significantly different. The CDM value was 90% greater than the EPA value for 2-line ferrihydrite (p = 0.0074). The CDM value was 56% less than the EPA value for hematite (p = 0.011).

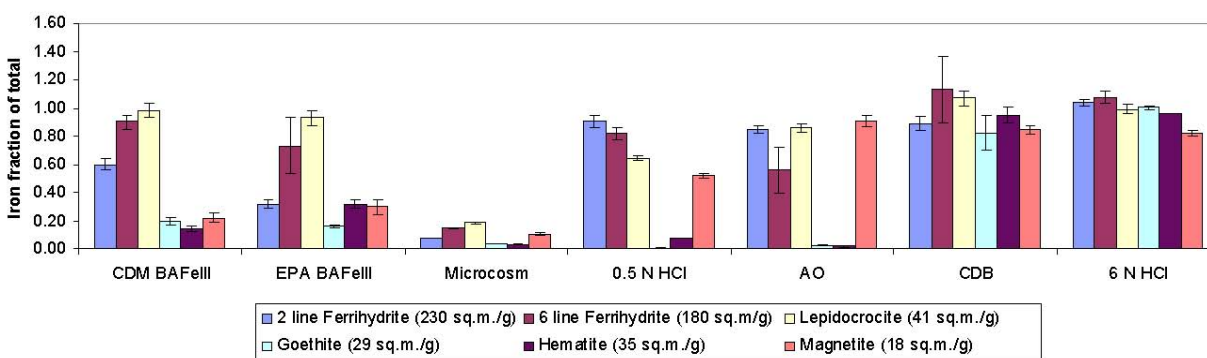


Figure 6. Summary of Iron Oxide Analytical Results.

Figure 6 also shows the specific surface area for each oxide. Goethite, hematite, and magnetite had relatively low Brunauer-Emmett-Teller (BET) surface areas and correspondingly low BAF_{FeIII} fractions based on the BAF_{FeIII} assay. Poorly crystalline, high surface area iron oxides such as 2-line and 6-line ferrihydrite demonstrated greater BAF_{FeIII} fractions than highly crystalline, low-surface-area iron oxides such as magnetite, hematite, and goethite. Such a relationship between bioavailability and surface area has been demonstrated previously (Roden and Zachara, 1996). On the other hand, lepidocrocite had a relatively low surface area and yet the highest BAF_{FeIII} fraction. Previous investigations have demonstrated that lepidocrocite has a high bioavailability even though its surface area is low (Roden, 2003; Schwertmann et al, 1986). The relatively high bioavailability of lepidocrocite appears to be related to its crystal structure (Cooper et al, 2000; Hersman et al, 2001). These data further indicate that factors other than surface area affect iron oxide bioavailability. Thus the direct BAF_{FeIII} bioassay yields results that are more representative of biological iron oxide reduction than are indirect chemical extractions.

A mass balance calculation on iron at the Elizabeth City fuel farm site was conducted to further validate the BAF_{FeIII} assay and illustrate the use of BAF_{FeIII} data. The mass balance was conducted by calculating the mass of BAF_{FeIII} originally present in the area impacted by hydrocarbons, calculating the mass of Fe^{II} removed in soluble form via downgradient

groundwater transport, and then comparing the two values. Comparisons of the calculated iron masses are presented in Table 6. These results indicate that the BAF_eIII assay did not underestimate the amount of BAF_eIII iron present in the soil and thus gave a more robust BAF_eIII estimate. Estimates of BAF_eIII obtained using 0.5 N HCl, ammonium oxalate, and CDB all underestimated the mass of BAF_eIII.

Table 6. Iron Mass Balance for Elizabeth City Fuel Farm.

Parameter	Estimated Mass (lb)
Minimum advectively removed FeII	13,000
Maximum advectively removed FeII	40,000
Minimum BAF _e III assay estimate	52,000
Maximum BAF _e III assay estimate	65,000
0.5 N HCl estimate	11,000
6 N HCl estimate	53,000
Ammonium oxalate estimate	16,000
CDB estimate	15,000
Total iron estimate	96,000

4.2 PERFORMANCE CRITERIA

Performance criteria and actual performance for the BAF_eIII assay are summarized in Table 7.

Table 7. Expected Performance and Performance Confirmation Methods for BAFeIII Assay.

Performance Criteria	Expected Performance Metric (pre-demonstration)	Performance Confirmation Method	Actual (post-demonstration)
<i>Primary Criteria (Performance Objectives) (Qualitative)</i>			
Relationship between BAFeIII assay and degree of iron oxide crystallinity/surface area	Positive association	Measurement of both BAFeIII and BET surface area for iron oxide standards with varying degrees of crystallinity and surface areas.	Generally a positive association with the exception of lepidocrocite, which was expected
Relationship between BAFeIII assay and confirmatory analyses	Positive association	Multivariate statistical analysis (principal components analysis) Loadings ≥ 0.45 for original variables within a principal component demonstrate positive association	Most of the variance in the original variables (about 43%) accounted for by two principal components; component 2 contained the BAFeIII variable and the BAFeIII-relevant confirmatory analysis variables with loadings greater than 0.45
Range of BAFeIII assay relative to other analytical techniques	Similar range	Comparison of analytical range to CDB extractable Fe, ammonium oxalate extractable Fe, total Fe, 0.5N and 6.0N HCl extractable FeIII, and to microcosm reducible FeIII with BrY	Range similar to or greater than all comparable methods examined; recommended minimum BAFeIII reporting limit, 0.1 g/kg
Sample throughput of BAFeIII assay	Labor time \leq similar methods	Comparison with other methods used to characterize BAFeIII	Labor time less than or approximately the same as other methods
Versatility of BAFeIII assay	Consistent performance	BAFeIII assay conducted on a wide variety of soils and standards, at a wide variety of sites, and under a wide variety of environmental conditions	Performance consistent with other methods used to characterize BAFeIII
<i>Primary Criteria (Performance Objectives) (Quantitative)</i>			
Intralaboratory precision of BAFeIII assay based on soil and laboratory replicates	Absolute RPD ≤ 35	Field and laboratory replicate sample collection and analyses	Average absolute RPD = 29.7
Interlaboratory precision of BAFeIII assay based on replicates analyzed by both CDM and EPA	$-35 \geq \text{RPD} \leq 35$	Field and laboratory replicate sample collection and analyses; blind standard analysis	Average RPD = 11.6, but difference between CDM and EPA results not statistically significant

4.3 DATA ASSESSMENT

A general assessment of the data was included in Section 4.1, and a more detailed assessment is presented in the Environmental Security Technology Certification Program (ESTCP) Final Report (NAVFAC, 2005). In summary, the following conclusions were made based on the data:

- Intralaboratory precision was better than the RPD criterion of 35. This precision level is adequate for the intended use. Precision deteriorated at BAF_eIII concentrations less than the recommended 0.1 grams per kilogram (g/kg) minimum reporting limit.
- Interlaboratory precision was excellent, and no statistically significant difference between CDM and EPA results was observed.
- Positive associations between the BAF_eIII assay and confirmatory analyses were observed using PCA of soil data. These results indicate the BAF_eIII assay yields results that are representative of iron bioavailability.
- An iron balance conducted on data obtained from the U.S. Coast Guard Support Station fuel farm site indicated that the BAF_eIII assay yields a more robust estimate of BAF_eIII compared to common chemical extraction methods.
- Data obtained using synthetic iron oxides of varying surface area indicated the direct BAF_eIII bioassay yields results that are more representative of biological iron oxide reduction than are indirect chemical extractions.
- The BAF_eIII assay is easy to use and involves addition of weighed soil samples to prepared test tubes, incubation, extraction, and measurement of reduced FeII with a Hach test kit.

4.4 TECHNOLOGY COMPARISON

No other standardized and direct method exists for measurement of BAF_eIII. The data demonstrated that the BAF_eIII assay yields a more robust estimate of BAF_eIII and yields results that are more representative of biological iron reduction than chemical extraction methods.

5.0 COST ASSESSMENT

ESTCP guidance states that costs should be reported in this section in the recommended Federal Remediation Technologies Roundtable (FRTR) format. However, this format is primarily suited for presenting costs associated with remedial process technologies where costs need to be broken down into categories such as capital, operational and maintenance, and life-cycle costs. Costs associated with purchasing and using the bioavailable iron assays do not fall into these categories, and so the FRTR format has not been used. This alternative costing approach was used in the ESTCP Final Report (NAVFAC, 2005) that was approved by ESTCP. The subsections below have been prepared to describe all costs associated with obtaining the assays and using them to analyze soil samples that have already been collected from a given site.

5.1 COST REPORTING

5.1.1 Purchasing the Test Kit

The test kit is currently commercially available as the “Bioavailable Ferric Iron Assay” produced by NHD of Columbia, Maryland. Information about the kit and how to order can be found online at www.nhdiag.com. Orders can be placed at 800-888-5015 or 410-992-9357. As of the writing of this report, the costs of the kits were:

- 1 to 11 kits: \$75 each
- 12 to 19 kits: \$60 each
- ≥ 20 kits: \$50 each.

Since the kit includes a reagent that contains bacteria which are temperature-sensitive, overnight shipping (not included in the above costs) is required. The kits contain syringes, syringe filters, HCl, incubation and sample vials, and the lyophilized BrY inoculum.

5.1.2 Additional Supplies/Equipment

To analyze FeII before and after incubation with BrY, a Hach kit is typically used. The reagent needed to run the 1,10-phenanthroline FeII method (Hach Method 8146) costs \$15 for 100 Hach reagent powder pillows, or about \$18 for 25 Hach AccuVac[®] ampules. The Hach method also requires colorimetric analysis to quantify the FeII as shown below:

- Using a high quality spectrophotometer (Hach models are about \$2,000)
- Using a Hach DR/800 series portable colorimeter (about \$600 to \$900)
- Using a Hach color disc (about \$30).

The choice of which of these methods to use will depend primarily on the number of samples to be analyzed in the long term, whether analyses are to be performed in the field, and on the availability of the required equipment. The color disc method is semiquantitative and is not recommended because of its low level of accuracy relative to the other two methods. Additionally, Quantofix[®] Iron 1000 test strips (VWR Part No. 60787-724) may be used (without

the Iron 1 reagent) to bracket the FeII range and thus the required dilution prior to conducting the Hach assay.

If only a few samples are to be analyzed, it may be most economical to have the T₀ and T₃₀ extract samples analyzed for FeII by a commercial analytical laboratory. Typically, this analysis can be performed for approximately \$30 per sample (i.e., \$60/bioavailable iron sample since both the T₀ and T₃₀ measurements must be conducted). A small tumbler or orbital shaker is needed for the HCl extraction steps of the assay to rotate the vials and mix of the soil with the acid. This item can be purchased from most lab supply companies for approximately \$250. Miscellaneous other supplies for performing the assay and FeII analyses include pipettes, beakers, a small field balance (accuracy to 0.1 gram), and safety ware (gloves and glasses). An approximate cost for these supplies is \$300.

5.1.3 Labor

The labor time required to perform the assay can be divided into three steps:

1. Vial T₀: Combine soil, HCl, and water. Vial T₃₀: Combine soil, water, and bioassay reagents.
2. Measure FeII in Vial T₀ following mixing for 48 hours.
3. After a 4-week incubation period, add HCl and measure FeII in Vial T₃₀ following mixing for 48 hours.

The first step takes approximately one-half hour, depending on the number of samples to be run. Running the Hach kit FeII analysis for Vial T₀ (step 2) typically takes 1.5 hours for up to five samples—this includes time to run standards and prepare dilutions as necessary. Following the 4-week incubation period, another hour and a half would be needed for step 3 to add the HCl to Vial T₃₀ and analyze for FeII. If an analytical lab is used for FeII analysis, the required labor would include labeling, packing, and shipping the sample containers, and filling out the chain of custody forms.

5.1.4 Cost Example

As a costing example, consider the following scenario:

- Six soil samples are to be analyzed for bioavailable iron at a given site.
- The samples have been collected (sample collection costs were not included).
- A field technician and bench space are available to perform the extraction steps.
- Neither a spectrophotometer nor Hach color-measuring equipment is available for the FeII analysis.

Costs under this scenario are shown in Table 8.

Table 8. BAF_eIII Assay Costs.

Item	Units	No. of Units	Unit Cost	Cost
Assay kits	Each	6	\$75	\$450
Ferrous Fe analysis (commercial lab)	Sample	12	\$30	\$360
Supplies	Lump sum	1	\$100	\$100
Labor	Hour	6	\$60	\$360
Total				\$1,270

The unit cost per sample is thus \$212. As an alternative, commercial laboratories can also be contracted to conduct the BAF_eIII analysis. Microseeps (www.microseeps.com) has quoted a price of \$250 per sample for the BAF_eIII analysis using the NHD test kit.

5.2 COST ANALYSIS

5.2.1 Cost Drivers

Primary drivers are the test kit procurement cost, FeII analysis cost, and labor cost (not including soil sampling costs). Soil sampling costs will be the primary driver in cases where soil sampling is conducted solely for the purpose of BAF_eIII analysis.

While not directly related to the cost of performing the bioavailable iron kit method, the 4-week incubation period may in some circumstances result in higher indirect costs compared to a method that gives results over a 2-week period typically associated with analytical lab turnaround times. Such indirect costs need to be considered on a case-by-case basis.

If, based on the results of analyzing initial soil samples, it is determined that additional analysis is warranted, then additional costs associated with obtaining additional soil samples would be necessary. These costs would be highly site-specific and would depend on the depth of sample needed, number of samples to be collected, and site access issues.

5.2.2 Sensitivity Analysis

Incremental BAF_eIII assay costs for soil sample collection are highly dependent on drilling method, depth, and sample collection frequency. For this sensitivity analysis, both direct push and conventional (e.g., hollow-stem auger) methods were considered. For direct push it was conservatively assumed that five borings to a depth of 50 feet could be conducted per day and that two soil samples would be collected from each boring for BAF_eIII analysis. At a daily drilling cost of \$2,500 (\$1,500 for the driller and \$1,000 for engineering oversight), the incremental cost for drilling per sample is \$250. For conventional drilling, the incremental cost was based on a unit drilling cost of \$50/foot and other parameters used for direct push. The incremental cost for drilling per sample is \$1,350 (\$1,560 - \$210). Table 9 summarizes the results of this sensitivity analysis demonstrating the effect of drilling costs on the total assay cost. Often other analyses including total organic carbon, cation exchange capacity, metals, grain size distribution, and USCS classification may also be conducted on the soil samples. The incremental cost is then apportioned over the various analyses.

Table 9. BAF_eIII Cost Scenarios.

Scenario	Total BAF_eIII Assay Cost per Sample
Drilling cost not included	\$210
Direct push drilling included, no other analyses conducted	\$460
Direct push drilling included, 4 other analyses conducted	\$260
Conventional drilling included, no other analyses conducted.	\$1,560
Conventional drilling included, 4 other analyses conducted.	\$480

5.2.3 Department of Defense (DoD)-Wide Savings

Standardized and cost-effective analytical technologies to support MNA and EAB efforts are necessary. The BAF_eIII assay is more costly than the current approach for BAF_eIII measurement (i.e., it is infrequently measured at the present time). However, it is anticipated that use of this method will promote more widespread acceptance and more cost-effective implementation of MNA and EAB at DoD sites.

The DoD is responsible for approximately 2,093 characterized chlorinated solvent plumes (U.S. EPA, 1997). MNA is applicable to approximately 20% of chlorinated solvent sites, or 420 of the DoD plumes (U.S. EPA, 1998). EAB may also be applicable to many of these sites. BAF_eIII analysis has not been conducted in the past because of difficulty, lack of standardization, and cost. The BAF_eIII assay and test kit is one of several tools that can now be used to support MNA and enhanced anaerobic bioremediation. This test kit will benefit the DoD by making this analysis available, which will promote application of MNA and EAB at these sites. However, estimation of the DoD savings attributable to the BAF_eIII test kit alone is challenging. Nevertheless, the average cost for a pump and treat operation is \$9.8 million per site (Quinton et al, 1997). If MNA is applied to 25% of the chlorinated plumes (~100 sites) at a cost of \$1 million per site, the potential savings is significant.

5.3 COST COMPARISON

5.3.1 Cost Comparison

For comparison purposes, the contract analytical lab costs for conducting synthetic precipitation leaching procedure (SPLP) or toxicity characteristic leaching procedure (TCLP) analyses with zero headspace extraction (ZHE) conducted on soil samples is on the order of \$90. ZHE is required to prevent oxidation of Fe^{II} to Fe^{III}. The extractions would be modified to use a particular chemical extractant such as 6N HCl. However, it is important to note that extraction with 6N HCl overestimates the bioavailability of many iron oxides, as shown in Figure 6. Analysis of extracts for total Fe and Fe^{II} is on the order of \$50. Thus the total cost is approximately \$140. Labor would be required for labeling, packing, and shipping the sample containers, and for filling out the chain of custody forms. This cost is 30% less than the BAF_eIII

assay cost. The cost of laboratory microcosms varies widely but typically is at least \$10,000 and can be as high as \$50,000. These costs are clearly greater than the BAF_{FeIII} assay.

5.3.2 Cost Basis

The analytical costs listed above are based on discussions with laboratories for performing an extraction procedure similar to the TCLP as described in 40 Code of Federal Regulations (CFR) 261/SW846 Method 1311 or SPLP, as described in 40 CFR 261/SW846 Method 1312. Only the extraction acid would be modified from the standard TCLP or SPLP method. The extractant would be analyzed for FeII and FeIII using the phenanthroline method number 3500-Fe D (Greenberg et al, 1992) with appropriate controls for acidity of the extracts.

This page left blank intentionally.

6.0 IMPLEMENTATION ISSUES

6.1 COST OBSERVATIONS

The unit procurement cost for the BAF_{Fe}III test kit ranges from \$50 to \$75, depending on the number of kits purchased. The total BAF_{Fe}III analysis cost is about \$210, not including soil collection costs. A BAF_{Fe}III site characterization may include 10 to 100 analyses; thus the total analytical cost would range from \$2,100 to \$21,000. This cost is generally a small fraction of the total site characterization and remediation cost. Soil sample collection will comprise most of the cost; thus conducting multiple analyses on collected soil samples is clearly warranted.

6.2 PERFORMANCE OBSERVATIONS

The BAF_{Fe}III test kit met all performance objectives and criteria. The fact that the relatively low surface area iron oxide lepidocrocite had a high BAF_{Fe}III concentration initially was an unexpected and interesting observation that supported the use of a direct bioassay approach in the test kit. This result deviated from the original hypothesis proposed for this demonstration/validation project but was later determined to be consistent with current scientific data and theories on iron bioavailability. Therefore, the BAF_{Fe}III test kit was demonstrated to be a reliable, precise, easy-to-use, and cost-effective assay that yields realistic and relatively robust estimates of BAF_{Fe}III for a wide variety of soil types.

6.3 SCALE-UP

The BAF_{Fe}III test kit can be used to analyze one or more samples. Scale-up is not especially relevant to this assay. However, processing a large number of samples may warrant subcontracting the work to a commercial analytical laboratory. Larger federal laboratories or research institutions will likely be capable of easily conducting the assay in-house.

6.4 OTHER SIGNIFICANT OBSERVATIONS

The test kit Reagent B (i.e., lyophilized strain BrY) must be kept frozen until ready for use or it will lose viability. The test kit Reagent A is stable at room temperature.

Soil sampling should be conducted with care to minimize exposure to air and oxidation of reduced iron oxides. Use of an anaerobic glove box is not considered necessary, but saturated samples should be handled quickly and packed full into jars to minimize headspace. Preferably, the assay should be initiated as quickly as possible. Maximum sample holding times for this assay have not been determined.

The BAF_{Fe}III test kit can be procured from NHD in Columbia, Maryland. Their phone number is 800-888-5015 and their web address is www.nhdiag.com.

6.5 LESSONS LEARNED

BAF_{Fe}III iron concentrations can vary laterally and vertically in impacted and background areas at a site. It is important to collect and analyze a sufficient number of samples to obtain useful

results that are not obscured by heterogeneity. In general, samples should be collected from zones of greatest contaminant mass flux because it is in these zones where BAF_{FeIII} consumption will represent the most significant attenuation of contaminant mass. Samples should be collected at multiple depths along plume transects and should include several upgradient and/or cross-gradient background soil samples. Duplicate analysis of samples is recommended. While these recommendations are not hard and fast, their intent is to dissuade the user from collecting just a few samples. Such a minimalistic approach is likely to result in less useful results.

The test kit can be used to estimate the maximum BAF_{FeIII} concentration in a soil or sediment sample. Groundwater chemistry also has a significant effect on iron bioavailability (Evans, 2000; Roden and Urrutia, 2002). Therefore, groundwater chemistry data should be considered in addition to BAF_{FeIII} assay results when making conclusions with respect to iron bioavailability.

6.6 END-USER ISSUES

Educating regulators on this test kit and on the importance of BAF_{FeIII} is necessary because this parameter is not commonly measured or reported. End users will be able to refer regulators to this Cost and Performance Report and the ESTCP Final Report (NAVFAC, 2005) when establishing the validity of this BAF_{FeIII} test kit. Currently available models that include BAF_{FeIII} as an input parameter will also promote education about and acceptance of this assay as described further in Section 6.7.

6.7 APPROACH TO REGULATORY COMPLIANCE AND ACCEPTANCE

Dr. John Wilson of the EPA has been a strong advocate of the need to quantify BAF_{FeIII} at contaminated sites. The EPA listed BAF_{FeIII} analysis as being under development in the Technical Protocol for Evaluating Natural Attenuation of Chlorinated Solvents in Ground Water (U. S. EPA, 1998). Dr. Wilson identified the BAF_{FeIII} test kit as a possible solution to this need. He was thus an important partner in this ESTCP project. Measuring of BAF_{FeIII} at sites is increasing in frequency and is becoming a regular component of natural attenuation and anaerobic bioremediation evaluations. An excellent example is the fate and transport model BIOPLUME IV, which includes BAF_{FeIII} as an input parameter. This model is currently being beta-tested by EPA. The fate and transport model BioRedox-MT3DMS also includes BAF_{FeIII} as an input parameter (Thompson et al 2004). The BAF_{FeIII} assay is also listed as an optional method to determine competition from iron reduction during EAB (AFCEE, 2004).

BAF_{FeIII} test kit results will be used to document natural attenuation processes and to design EAB remedies. In both cases, the data can be used to provide regulators with a more complete and accurate technical basis for the site remedial approach. This ESTCP Cost and Performance Report will be an instrumental component of this interaction with respect to technology validation.

7.0 REFERENCES

- AFCEE (Air Force Center for Environmental Excellence). 2004. Principles and Practices of Enhanced Anaerobic Bioremediation of Chlorinated Solvents.
- ARCADIS. 2004. 3rd Event (Quarterly, October 2003) Groundwater Monitoring Report – HRC Injection Pilot Study, North Beach Disposal Area (SWMUs 28 and 56), United States Coast Guard Support Center, Elizabeth City, North Carolina. January.
- Battelle Memorial Institute. 2000. Technology Demonstration Plan, Reductive Anaerobic Biological In Situ Treatment Technology (RABITT) Treatability Testing at the East Gate Disposal Yard Site, Fort Lewis, Washington.
- CDM. 2001. Technology Demonstration Plan, Development of a Dissolved Hydrogen Analyzer and a Bioavailable Ferric Iron Assay. Environmental Security Technology Certification Program Project No. CU-200009.
- Cooper, D.C., F. Picardal, J. Rivera, and C. Talbot. 2000. Zinc Immobilization and Magnetite Formation via Ferric Oxide Reduction by *Shewanella putrefaciens* 200. Environ. Sci. Technol, 34:100-106.
- EA Engineering, Science and Technology. 2000. Final Technical Memorandum Preliminary Evaluation of the Natural Attenuation Process Phase II Operable Unit 8 Naval Submarine Base Bangor, Kitsap County, Washington.
- Environmental Protection Agency (EPA). 1997. Clean Up the Nation's Waste Sites: Markets and Technology Trends. EPA/542/R-96/005.
- Environmental Protection Agency (EPA). 1998. Technical Protocol for Evaluating Natural Attenuation of Chlorinated Solvents in Groundwater. EPA/600/R-98/128.
- Environmental Protection Agency (EPA). 2002. Contract Laboratory Program, National Functional Guidelines for Inorganic Data Review. EPA 540-R-01-008.
- Evans, P.J. 1997. A Bioassay for Quantifying Intrinsic Bioremediation Potential of Fuel Hydrocarbons by Iron-Reducing Bacteria. Report Number AL/EQ-TR-1997-0004, DoD Contract Number F41624-96-C-0009.
- Evans, P.J., and K.A. Jones. 1999. Development of a Dissolved Hydrogen Analyzer and a Bioavailable Ferric Iron Assay. Phase II SBIR Final Report submitted to Tyndall Air Force Base AFRL/MLQE, DoD Contract Number F41624-97-C-0005.
- Evans, P.J., K.A. Jones, C.C. Liu, and D.R. Lovley. 1999. Development of a Natural Attenuation Test Kit. In: Natural Attenuation of Chlorinated Solvents, Petroleum Hydrocarbons, and Other Organic Compounds (B.C. Alleman and A. Leeson, eds.). Battelle Press, Columbus, pp. 331-336.

- Evans, P.J. 2000. A Novel Ferric Iron Bioavailability Assay. In: Risk, Regulatory, and Monitoring Considerations (G.B. Wickramanayake et al., eds.). Battelle Press, Columbus, pp. 167-174.
- Evans, P.J., and S.S. Koenigsberg. 2001. A Bioavailable Ferric Iron Assay and Relevance to Reductive Dechlorination. In: Bioaugmentation, Biobarriers, and Biogeochemistry (A. Leeson et al, eds.). Battelle Press, Columbus, pp. 167-174.
- Greenberg, A.E., L. S. Clesceri, and A.D. Eaton (eds.). 1992. Standard Methods for the Examination of Water and Wastewater. American Public Health Association, American Water Works Association, and Water Environment Federation. Washington, D.C.
- Hacherl, E.L., D. S. Kosson, L.Y. Young, and R.M. Cowan. 2001. Measurement of Iron(III) Bioavailability in Pure Iron Oxide Minerals and Soils Using Anthraquinone-2,6-disulfonate Oxidation. *Environ. Sci. Technol.* 35:4886-4893.
- Hersman, L.E., J.H. Forsythe, L.O. Ticknor, and P.A. Maurice. 2001. Growth of *Pseudomonas mendocina* on Fe(III) (Hydr)Oxides. *Appl. Environ. Microbiol.* 67:4448-4453.
- Lovley, D.R., and E.J. Phillips. 1987. Rapid Assay for Microbially Reducible Ferric Iron in Aquatic Sediments. *Appl. Environ. Microbiol.* 53:1536-1540.
- NAVFAC. 2005. Final Report. Field Demonstration and Validation of a Bioavailable Ferric Iron Assay. ESTCP Project Number 200009. Naval Facilities Engineering Command (NAVFAC) Engineering Service Center. Port Hueneme, California. Report CR-05-002-ENV.
- Quinton, G.E., R.J. Buchanon, D.E. Ellis, and S.H. Shoemaker. 1997. A Method to Compare Groundwater Cleanup Technologies. *Remediation, Autumn*, pp. 7-16.
- Roden, E.E. 2003. Fe(III) Oxide Reactivity Toward Biological versus Chemical Reduction. *Environ. Sci. Technol.* 37:1319-1324.
- Roden, E.E., and J.M. Zachara. 1996. Microbial Reduction of Crystalline Iron (III) Oxides: Influence of Oxide Surface Area and Potential for Cell Growth. *Environ. Sci. Technol.* 30:1618-1628.
- Roden, E.E., and M.M Urrutia. 2002. Influence of Biogenic Fe(II) on Bacterial Crystalline Fe(III) Oxide Reduction. *Geomicrobiol. J.* 19:209-251.
- Schwertmann, U., H. Kodama, and W.R. Fisher. 1986. In: Interactions of Soil Minerals with Natural Organics and Microbes (P.M. Huang and M. Schnitzer, eds.). Soil Science Society of America, Inc., Madison, Wisconsin. SSSA Special Publication Number 17, p. 237.

Thompson, A.-M., P.J. Van Geel, and W. J. Parker. 2004. Evaluating the Dissolution and Natural Attenuation of Jet Fuel at a Former Tank Farm. *J. Environ. Eng. Sci.* 3:107-118.

U.S. Geological Survey and Southern Division, Naval Facilities Engineering Command. 1999. Monitoring Plan for Natural Attenuation Remediation, Waste Water Treatment Plant, Pensacola, Florida.

Wilson, J.T., J.S. Cho, B.S. Wilson, and J.A. Vardy. 2000. Natural Attenuation of MTBE in the Subsurface under Methanogenic Conditions. EPA/600/R-00/006.

This page left blank intentionally.

APPENDIX A

POINTS OF CONTACT

Point of Contact	Organization	Phone/Fax/E-mail
<i>ESTCP Program Office</i>		
Andrea Leeson	SERDP 901 N. Stuart Street, Suite 303 Arlington, VA 22203-1853	Phone: (703) 696-2118 Fax: (703) 696-2114 E-mail: Andrea.Leeson@osd.mil
Kelly Woodworth	HGL 1155 Herndon Parkway, Suite 900 Herndon, VA 20170	Phone: (703) 736-4539 Fax: (703) 478-0526 E-mail: kwoodworth@hgl.com
<i>Project Management</i>		
Carmen A. Lebron (Principal Investigator)	Naval Facilities Engineering Services Center (NFESC) Restoration Development Branch Code ESC411 1100 23rd Avenue Port Hueneme, CA 93043-4370	Phone (805) 982-1616 Fax: (805) 982-4304 E-mail: carmen.lebron@navy.mil
Barbara Sugiyama	NFESC Restoration Development Branch Code ESC411 1100 23rd Ave. Port Hueneme, CA 93043	Phone: (805) 982-1668 Fax: (805) 982-4304 E-mail: barbara.sugiyama@navy.mil
<i>CDM Staff</i>		
Patrick Evans (Co-Principal Investigator)	CDM 11811 NE 1st Street, Suite 201 Bellevue, WA 98005-3033	Phone: (425) 453-8383 Fax: (425) 646-9523 E-mail: evanspj@cdm.com
Roger Olsen	CDM 1331 17th Street, Suite 1200 Denver, CO 80202	Phone: (303) 298-1311 Fax: (303) 293-8236 E-mail: olsenrl@cdm.com
Rick Chappell	CDM 1331 17th Street, Suite 1200 Denver, CO 80202	Phone: (303) 298-1311 Fax: (303) 293-8236 E-mail: chappellrw@cdm.com
<i>Partners</i>		
Eric Weber	EPA 960 College Station Road Athens, GA 30605-2700	Phone: (706) 355-8224 Fax: (706) 355-8202 E-mail: weber.eric@epa.gov
John Wilson	EPA Kerr Lab Road Ada, OK 74820	Phone: (580) 436-8534 Fax: (580) 436-8534 E-mail: Wilson.Johnt@epamail.epa.gov
John Drexler	Geology Department University of Colorado Benson Earth Science Building Room 125 2200 Colorado Avenue Boulder, CO 80309	Phone: (303) 492-5251 Fax: (303) 492-2606 E-mail: drexlerj@spot.colorado.edu
Thomas DiChristina	School of Biology Cherry Emerson Building Ferst Drive Georgia Institute of Technology Atlanta, GA 30332-1230	Phone: (404) 894-8419 Fax: (404) 894-0519 E-mail: thomas.dichristina@biology.gatech.edu



ESTCP Program Office

901 North Stuart Street
Suite 303
Arlington, Virginia 22203
(703) 696-2117 (Phone)
(703) 696-2114 (Fax)
e-mail: estcp@estcp.org
www.estcp.org